


Square Grid Magnet

High Intensity – Rare Earth



Data Sheet No 504

Product Data:-

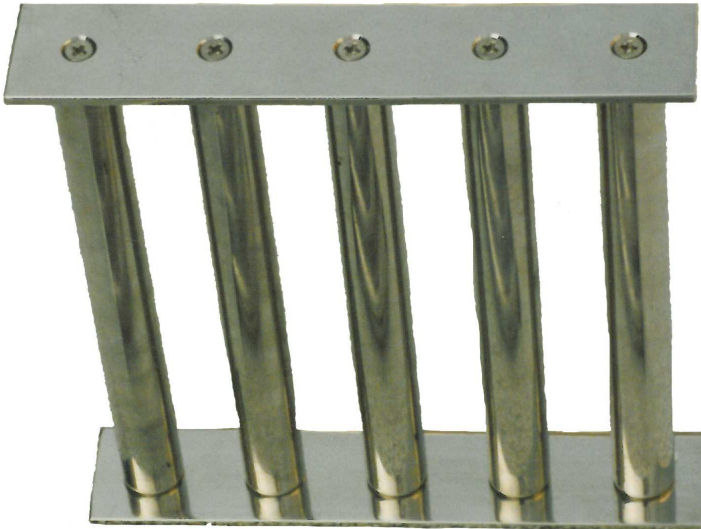

Preface:

The Eclipse high intensity square grid is very versatile and can be utilised in most powder, granulate and liquid applications for the removal of ferrous and paramagnetic contamination down to sub micron in size.

These units can be manufactured to any size and with any number of rods to meet most application requirements. Due to the grids low profile side frame these units can be installed into existing chute work or machinery where height is a restriction.



Grids are of particular interest to OEM's who wish to incorporate them into their machinery with the minimal amount of redesign and also offering flexibility.

Cleaning:

Due to the high intensity magnetic field, and simple design fixed grids require more effort to clean than the Eclipse 'Easy Clean' design. Remove the grid from it's process position and using a cloved hand push the contamination down each rod which will release the majority of all attracted contamination.

For any remaining contamination sticky tape can be used to remove the remaining or very fine contaminants.

Please consider using the Eclipse Easy Clean grids data sheet 506 as an alternative.

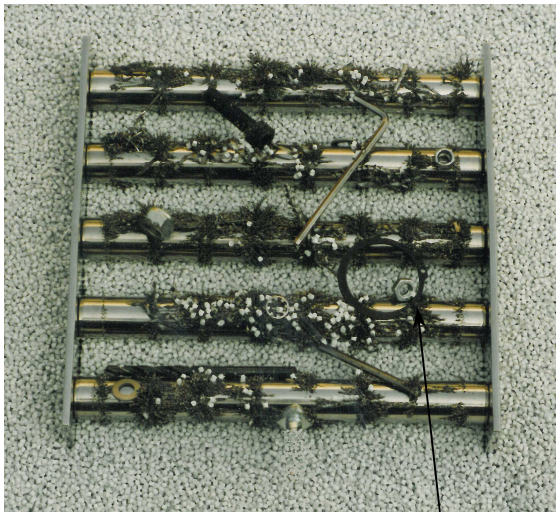

Suitable Products:

Dry powders & granulates.

Suitable Locations:

Any vertical or slightly angled process line.

Benefits:

- Simple to install
- Reduces 'spark' risk
- Removes sub micron sized contaminants
- Meet audit requirements
- Rare Earth 9,000 Gauss

Category:

Secondary.




Square Grid Magnet

High Intensity – Rare Earth



Technical Data:-

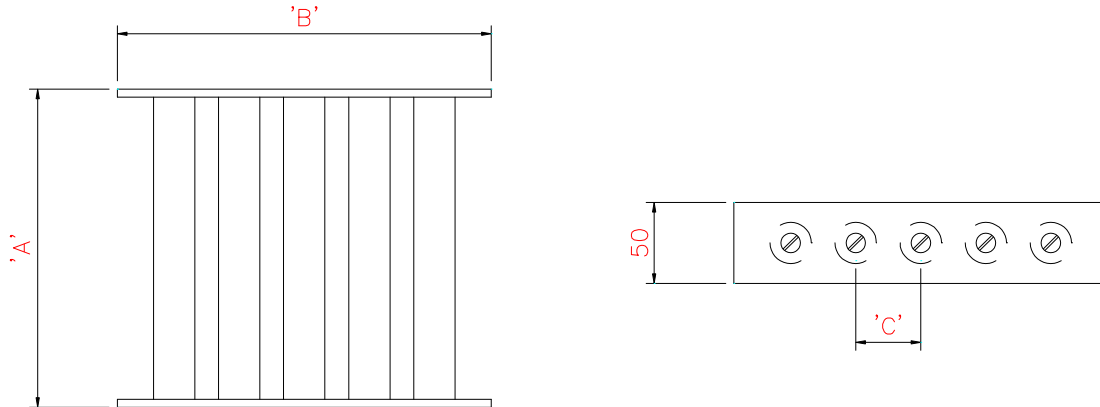

Sizes:-

Part No	Length A	Width B	Centres C	No. Rods	Weight Kgs
GM1515	150	150	60	2	3.2
GM2020	200	200	60	3	3.8
GM2525	250	250	55	4	6.2
GM3030	300	300	55	5	8.0
GM3535	350	350	55	6	11.0
GM4040	400	400	55	7	14.8
GM4545	450	450	55	8	19.2
GM5050	500	500	55	9	21.0

All dimensions in mm

Performance:-

Magnetic Performance:

7,000 Gauss - Standard Strength
9,000 Gauss - High Strength
11,000 Gauss – Super High Strength

Performance Reading:

On tube surface

Magnetic Material:

Rare Earth Neodymium Iron Boron

Magnet Grade:

N35 & N45 – Inspected & confirmed via hystergaph prior to use

Temperature:

-20° C/ + 90° C

Materials:-

Grid Frame:

316 Grade Stainless Steel

Tubing:

316 Grade Stainless Steel – Aerospace Quality

Other Parts:

316 Grade Stainless Steel

Surface Finish:

Polished to 0.6µm

Options:-

High temperature Samarium Cobalt magnetic material + 250° C

Sizes up to 1000mm x 1000mm

Pharmaceutical specification

Safety relay switch

ATEX certified

Eclipse Magnetics Ltd - A Spear & Jackson Group Company

Atlas Way, Atlas North, Sheffield, S4-7QQ, England

Tel:- ++44 (0)114 225 0555 Fax:- ++44 (0)114 225 0525

e-mail enquiries@eclipse-magnetics.co.uk - Web Site www.magneticseparation.co.uk

102008-Issue 1

Copyright Eclipse Magnetics 2008

